

# HRV1.35 Q Plus - Enthalpy

Ultra energy efficient Heat Recovery Ventilation unit


## For use in small to medium sized dwellings

The high capacity HRV1.35 Q Plus continuously running whole-house ventilation unit with heat recovery maintains an ultra compact size despite its improved airflow performance.

Combining extremely low power consumption and a highly efficient heat exchanger, this unit remains versatile enough in size to be equally as functional in larger apartments as it is in small to medium sized dwellings.

The counter flow enthalpy heat exchanger has a selective polymer membrane film to achieve low air leakage levels while providing moisture recovery from the exhaust air. These models are ideal for living areas with low humidity, avoiding frost build up at low temperatures, they also have an antimicrobial membrane and long life cycle.

MVHR





## Features & Benefits

- Versatile compact unit
- Highly efficient enthalpy counter flow heat exchanger
- Airflow up to 66l/s (237 m<sup>3</sup>/h) at 100 Pa
- Accepts 100mm or 125mm diameter ducting, no adaptors required
- Intelligent frost protection
- ISO Coarse 55% (G3) filters as standard, ISO Coarse 60% (G4) as an option
- Fully adjustable boost overrun timer 0-60 minutes; can be used with non-latching (momentary) switches to prevent unit from being accidentally left in boost mode
- Setback facility to reduce ventilation where local regulations allow
- Intelligent Summer Bypass and humidity controls
- Volt free switching control
- Intelligent controller, quick and easy to commission
- Lightweight for easy handling
- Quick fix mounting bracket
- On board aura-t™ option
- Patented
- IP32 rating
- Independent fan adjustment
- SUMMERboost® facility
- Effective in reducing pollutants in the home and improving Indoor Air Quality (IAQ), therefore reducing the risk of Toxic Home Syndrome
- Available in left and right handed configurations

## Eco BE Models:

- Compatible with Eco-aura range; aurastat®, auramode® and aura-t™ controllers and auralite® HRV (TP519) status indicator.
- Duct Pre-heater control (requires independent power supply)
- BMS compatible via RS485 (subject to limitations, additional software requirements and specification with any order)
- Standard - Volt Free switching and switch live control

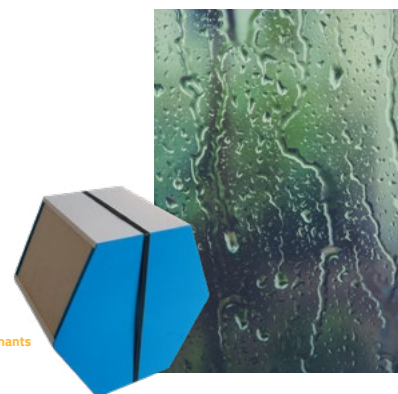

## Product Codes

HRV1.35 Q Plus B Eco Enthalpy  
Eco-aura controls ready -  
**TP418BE/LH** (left hand config) or  
**TP418BE/RH** (right hand config) - Energy Rating A

### Filters:

**XP40032/099** - ISO Coarse 55% (G3) filters fitted as standard (UK only).  
**XP46022/099** - ISO Coarse 60% (G4) filters fitted on request. (Europe fitted as standard).  
**XP2011094/099** - ISO Coarse 55% (G3)/ISO ePM1 50% (F7) filters available on request.  
**XP2011095/099** - ISO Coarse 60% (G4)/ISO ePM1 50% (F7) filters available on request.

## Standards

EU RoHS Directive compliant.

Conforms to requirements of EC council directives relating to Electromagnetic Compatibility and Electrical Safety:

2006/95/EC (LVD), 2004/108/EC (EMC)  
EN 60335-1:2002/A2:2006, EN 60335-2- 80:2003/A1:2004.

CE and UKCA marked.

## Specification

**Dimensions:** 600mm wide x 430mm high (excluding ports) x 285mm deep (295mm with mounting bracket)

**Weight:** 18kg

**Finish:** White Paint

### Materials:

Housing: Zintec sheet steel housing, powder coated white

Internals: Expanded polypropylene (EPP)

Heat exchanger: Selective polymer membrane film

Internal insulation: Closed cell foamed

Nitrile rubber, class 'O' fire rating

Standard filters: Grade ISO Coarse 55% (G3) synthetic filters

**Guarantee period:** 3 years (UK only)


**Electrical:** 230V ~ 50/60Hz, 3A fuse

**Installation:** To be installed accordance with the relevant and applicable building regulations.

**Maintenance:** Service and filter clean/replacement subject to local environment - see product manual.

**Acoustics:** Full acoustic data available online [www.titon.com/acoustics](http://www.titon.com/acoustics).

## Drawing & Dimensions

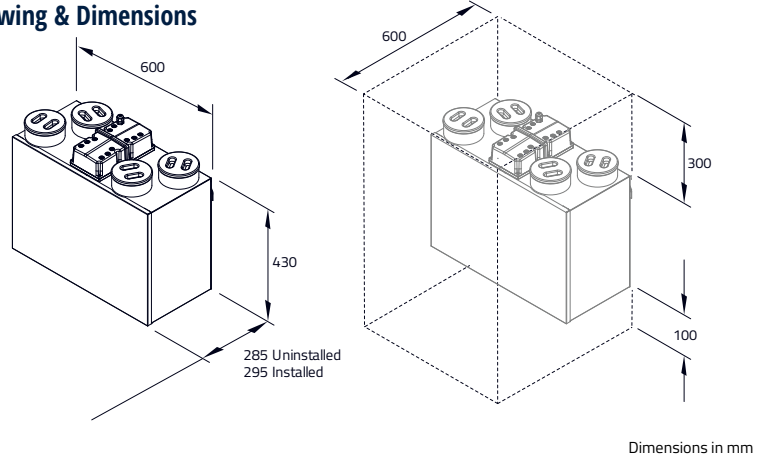

## Heat Cell

### Technical Data


(Typical conditions at 140 m<sup>3</sup>/h)

- Heat change rate 80%
- Degree of moisture change 70%
- Leakage at 100 Pa < 1%
- Temperature stability - 25°C up to 65°C

### Features & Benefits

- No transfer of gases or pollutants - only heat and water vapour transferred by the membrane
- Long life cycle - permanent transmission parameters
- Minimum leakage
- Optimum flow behaviour, low pressure loss
- Frost- and heat-proof
- High, sensitive and latent transmission rate
- Antimicrobial (Microban® - integrated hygiene protection)
- Can be cleaned using water
- European manufactured heat cell

## Nominal Fan Performance

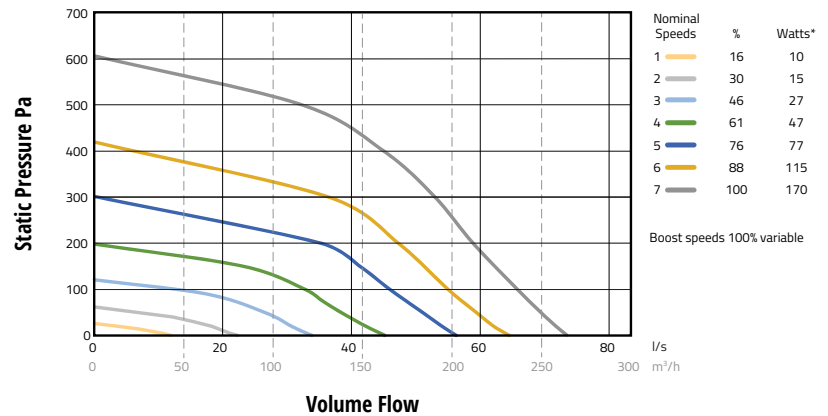

\*@FID (0 Pa)  
100% variable speed control. Performance curves for Eco version.

## Acoustic Data

Product	Airflow	dB(A) @ 3m Hemispherical			dB(A) @ 3m Spherical
		Induct Inlet	Induct Outlet	Casing Breakout	Casing Breakout
HRV1.35 Q Plus Enthalpy	22l/s @ 12Pa	28	39	19	16
	39l/s @ 38Pa	40	52	29	26
	60l/s @ 100Pa	47	61	36	33

For full frequency acoustic data at various speeds please see [www.titon.com](http://www.titon.com). All acoustic data is third party tested at Sound Research Laboratories (SRL) Ltd.